


amiga™ plus whirlpool bath

never has there been a friend—an “amiga”—so comforting, so indulging: the amiga™ whirlpool bath.

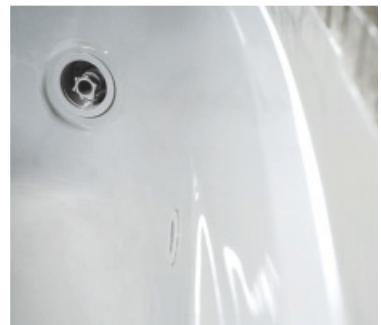

Your best friend at the end of any long day, the Amiga™ a simple, enveloping form.

features:

- 4 fully adjustable TheraPro™ jets
- 4 directionally adjustable AccuPro™ jets
- RapidHeat™ in-line heater
- Electronic on/off control with temperature readout
- Patented Adjustable Silent Air™ Induction System
- Optional Chromatherapy underwater lighting
- Sculpted armrest and contoured backrest
- PrO₃™ Ozone Sanitation System standard

amiga™ plus whirlpool bath

model number: **BP69 - LH**
EM80 - RH

exterior dimensions:
72" long x 36" wide x 20¾" high

interior dimensions:
45" long x 22" wide

of Jets/type of Jets:
4 TheraPro™ Jets,
4 AccuPro™ Back Jets

operating gallons:
63 gallons

Detail: The Amiga™ Plus whirlpool bath includes three exclusive Jacuzzi® TheraPro™ massaging jets and a sculpted armrest.





Amiga™ Plus Whirlpool Bath

Model: BP69 - LH, EM80 - RH

Ordering Information

Product Code:

BP69 Amiga™ Plus Whirlpool Bath
Left Hand

EM80 Amiga™ Plus Whirlpool Bath
Right Hand


• Left Hand Drain Location

• Accessories / Hardware:

TheraPro™ Jet Rings Kit: #D095
AccuPro™ Jet Rings Kit (2Req'd): #P556
Trip-Lever Drain Kit #X559
Rotary Drain Kit, 26" Cable #8730

• Trim Kit Finishes Available:

(827) - Chrome
(898) - Brushed Chrome
(815) - Satin Nickel
(829) - Bright Brass
(805) - Platinum
(826) - Brushed Nickel
(845) - Oil Rubbed Bronze

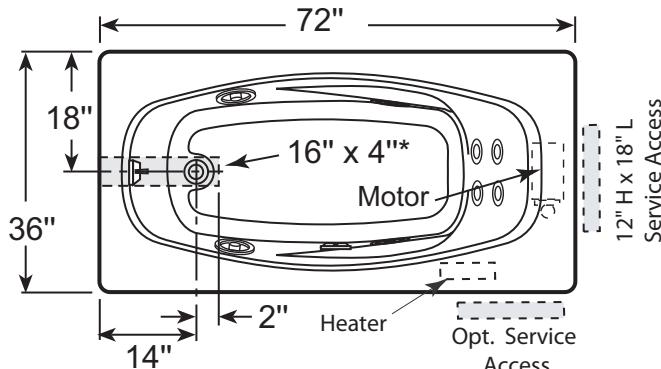

Product Shown: Amiga™ Plus Whirlpool Bath Left Hand Shown Model: BP69

* Measurements inside unit represent cutout in floor to allow for drain/overflow.
Minimum Service Access dimensions given.

Installation Notes

Refer to installation instructions included with fixture before beginning installation.
Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE
WITHOUT NOTICE.

Technical Specifications

Dimensions

72" L x 36" W x 20-3/4" H
(1829 mm) L x (914 mm) W x (527 mm) H

Drain/Overflow

A: 16-7/8" (429 mm) B: 14" (356 mm)

Cutout

70" x 34"

Total Weight

772 lb. (350 kg) / 49 lb/sq. ft. (240 kg/m²)

Operating Gallonage

63 U.S. Gal. (238 Liters)
Min. 54 U.S. Gal. (204 Liters)
Max. 72 U.S. Gal. (273 Liters)

Product Weight

105 lb. (48 kg)

Skirt Mounting


Optional U-Frame

Electrical Specifications


Requires a dedicated GFCI protected separate circuit.
Motor/Pump: 120 VAC, 15 AMP, 60 Hz.
RapidHeat™: 120 VAC, 15 AMP, 60 Hz.

Heater (Standard)


Requires a dedicated GFCI protected separate circuit.
RapidHeat™: P/N S750000

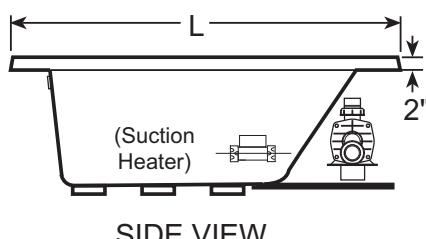

SIDE VIEW



END VIEW



DRAIN/OVERFLOW